


Industrial Grade Outlet Units (BPS Series)

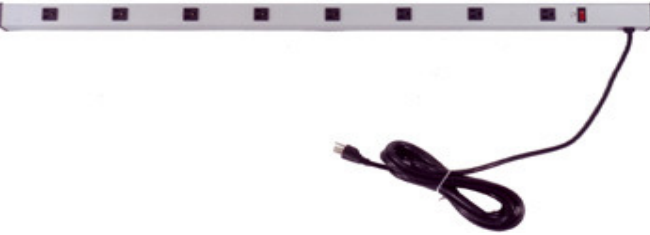

These units are designed for industrial applications such as computer cabinets, racks, and other areas where multiple outlets are needed. All models are UL1363 or UL60950 approved and come standard with a 15 Amp or 20 Amp circuit breaker, mounting hardware (clips snap & slide), and a lifetime warranty. On/Off switch available for all models. The 20 Amp models are complete with 20 Amp circuit breaker, wiring, switch and 20 Amp duplexes or single receptacles.

Features

- Heavy Duty Aluminum Housing
- Circuit Breaker Standard
- 6 or 15 Foot Power Cord (Other lengths available)
- Twist Lock Plug Available
- UL1363 & UL60950 Approved
- Lifetime Warranty

[Printable PDF](#)



Model No.	Outlets	Outlet Spacing Ctr to Ctr	Electrical Rating	Cord Length	Amps	Dimensions
15 Amp - UL1363, 12 Amp - UL60950						
BPS 24-8-6	8	2 1/2"	125 V, 60 Hz, 15 Amps	6'	15	24" x 2" x 1 7/8"
BPS 24-8-15	8	2 1/2"	125 V, 60 Hz, 15 Amps	15'	15	24" x 2" x 1 7/8"
BPS 36-10-6	10	2 1/2"	125 V, 60 Hz, 15 Amps	6'	15	36" x 2" x 1 7/8"
BPS 36-10-15	10	2 1/2"	125 V, 60 Hz, 15 Amps	15'	15	36" x 2" x 1 7/8"
BPS 48-12-6	12	3 1/2"	125 V, 60 Hz, 15 Amps	6'	15	48" x 2" x 1 7/8"
BPS 48-12-15	12	3 1/2"	125 V, 60 Hz, 15 Amps	15'	15	48" x 2" x 1 7/8"
BPS 72-15-6	15	4 1/2"	125 V, 60 Hz, 15 Amps	6'	15	72" x 2" x 1 7/8"
BPS 72-15-15	15	4 1/2"	125 V, 60 Hz, 15 Amps	15'	15	72" x 2" x 1 7/8"
20 Amp - UL1363, 16 Amp UL60950						
BPS 24-8-6 (20A)	8	2 1/2"	125 V, 60 Hz, 20 Amps	6'	20	24" x 2" x 1 7/8"
BPS 24-8-15 (20A)	8	2 1/2"	125 V, 60 Hz, 20 Amps	15'	20	24" x 2" x 1 7/8"
BPS 36-10-6 (20A)	10	2 1/2"	125 V, 60 Hz, 20 Amps	6'	20	36" x 2" x 1 7/8"
BPS 36-10-15 (20A)	10	2 1/2"	125 V, 60 Hz, 20 Amps	15'	20	36" x 2" x 1 7/8"
BPS 48-12-6 (20A)	12	3 1/2"	125 V, 60 Hz, 20 Amps	6'	20	48" x 2" x 1 7/8"
BPS 48-12-15 (20A)	12	3 1/2"	125 V, 60 Hz, 20 Amps	15'	20	48" x 2" x 1 7/8"
BPS 72-15-6 (20A)	15	4 1/2"	125 V, 60 Hz, 20 Amps	6'	20	72" x 2" x 1 7/8"
BPS 72-15-15 (20A)	15	4 1/2"	125 V, 60 Hz, 20 Amps	15'	20	72" x 2" x 1 7/8"

For Duplexes instead of single receptacles add (D), Switch (S), Pilot Light (PL), Twist Lock Plug (TL)

Custom units from 6" to 77" with max of 24 outlets

